MOMENTUM
FOLDING CLOSURE

The Momentum Folding Closure is a versatile solution for internal and external applications such as shopfronts, cafes, reception areas, and bars. It features 2mm perforated aluminium panels, eliminating the need for complicated bulkheads and motors. With no headroom requirement and the ability to span large openings without heavy mullions, it offers both practicality and style.
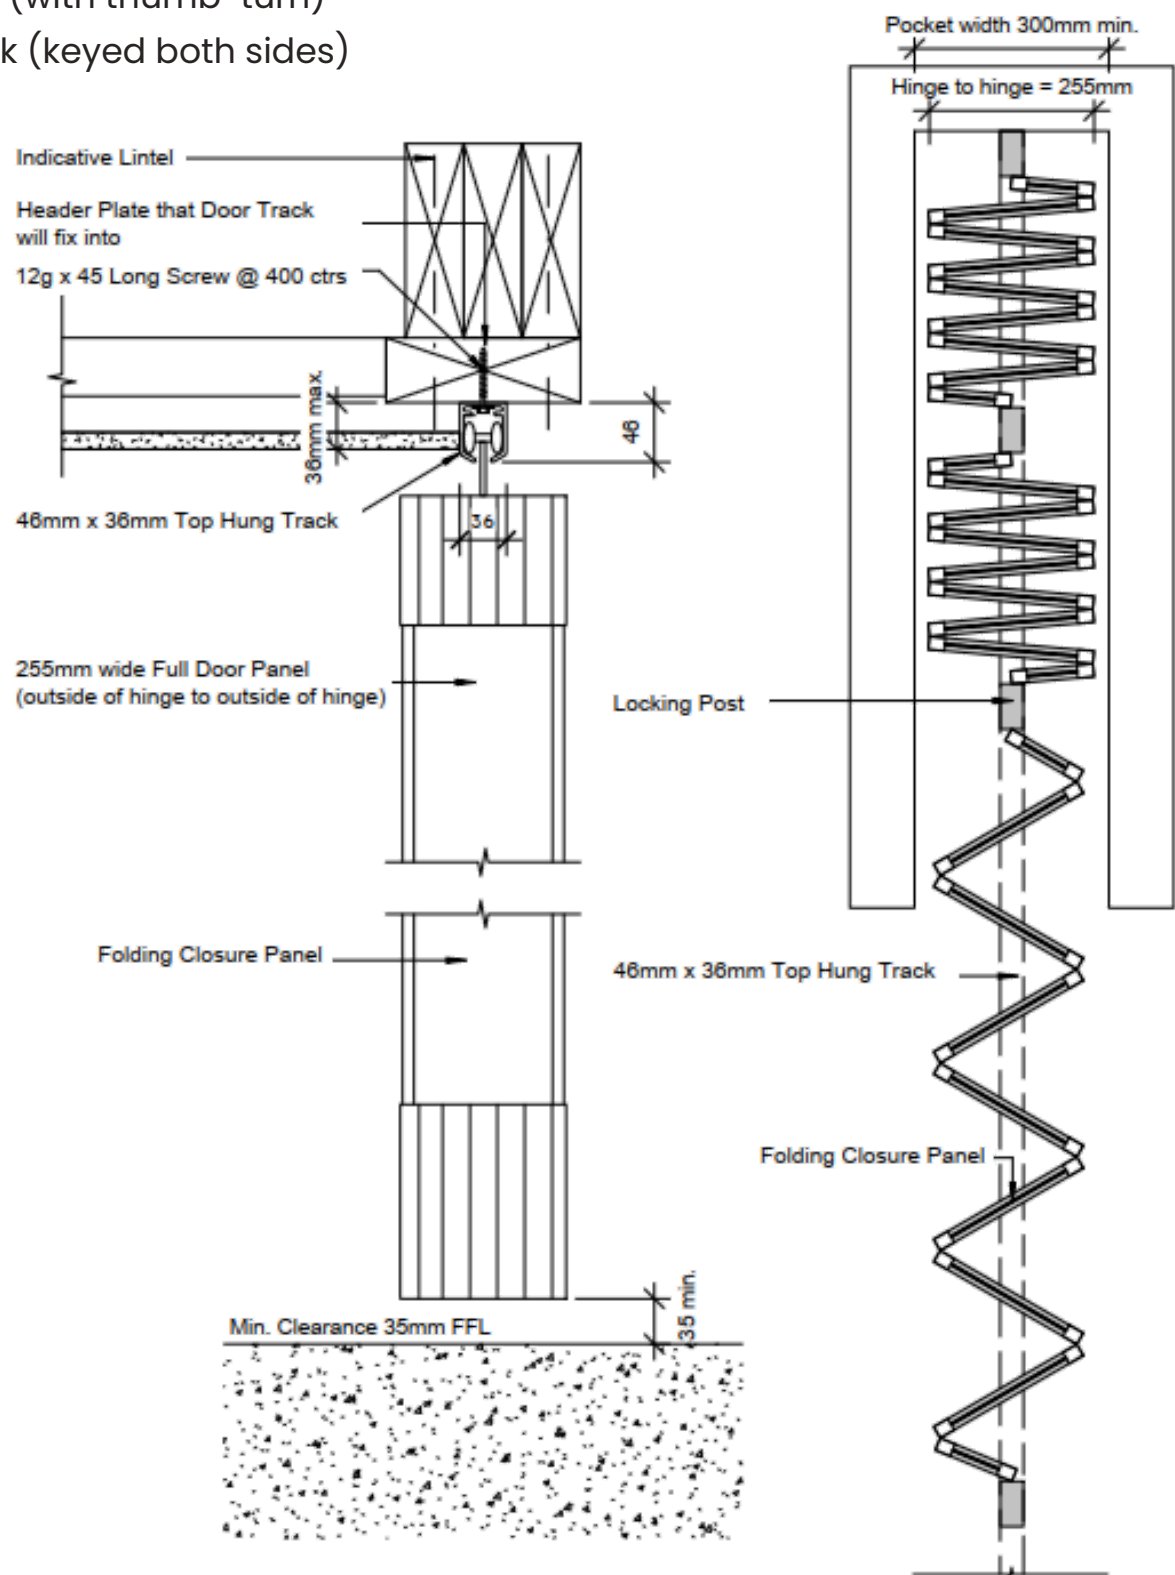
TECHNICAL SPECIFICATIONS

MAXIMUM WIDTH	Unlimited
MAXIMUM HEIGHT	4200mm
APPROX. WEIGHT PER SQM	12 kgs. per sqm
PANEL TYPE	Perforated aluminium
PANEL WIDTH	205mm (255mm hinge to hinge)
PANEL THICKNESS	2mm
LOCKING POSTS	70mm deep x 35mm wide
CEILING TRACKS	46mm deep x 36mm wide (36mm allowed to be recessed)
STANDARD CURVES	45º and 90º	230mm radius (special curves upon request)
DOOR FINISH	Standard Satin Silver Anodised / Dulux Duralloy Powder Coating

LOCKING POSTS

- Main locking posts have a top & bottom mechanically retractable locking system
- Intermediate posts have bottom-locking pins
- Bi-parting posts are available with latch-locking systems for easy egress where required

LOCKING (Euro Cylinders)

- Snib Lock (with thumb-turn)
- Dead Lock (keyed both sides)

EXTERNAL WORKS BY OTHERS

- Structurally sound timber structure (throughout the ceiling track line) to support the folding closure, designed & approved by a certified engineer
- Adequate room for the door within the pocket, if required (inquire with Scotty Doors)

PRODUCT WARRANTY

12 months (Materials and Workmanship)

Scotty Doors Ltd has a continuing programme of product development and reserves the right to alter specifications at any time without notice.

A full range of extra details available at **www.scottydoors.com**

+64 9 479 4779 | 0800 760 687
office@scottydoors.com
www.scottydoors.com
30 Tarndale Grove, Rosedale 0632 Auckland, New Zealand
PO Box 305041, Triton Plaza 0757 Auckland, New Zealand